


FullView[®] and FlatView[®]

DATA SHEET

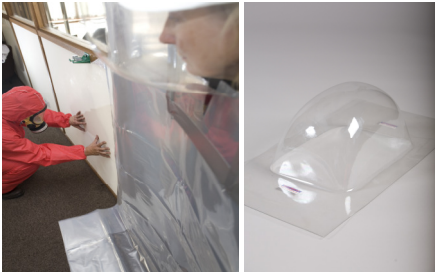

FullView from CSD Systems overcomes the problem of blind spots when providing external examination of working areas.

The FullView design is an innovative vision panel designed primarily for inspecting areas where asbestos removal is taking place but equally useful for inspecting other closed off hazardous areas.

KEY BENEFITS

- Innovative, low cost advance on conventional flat viewing panels
- Simple fail-safe design
- Unlike CCTV, it needs no batteries or mains supply
- Can be installed anywhere
- Lightweight but robust
- Sized to fit a head with safety helmet
- Enables rapid health and safety inspection without the use of specialist protective clothing

CSD's FullView vision panel makes it possible to see what's happening – everywhere – without the need for costly high-tech cameras. This low-tech acrylic vision panel literally lets you see round corners due to its special dome-shaped indentation – just the right size to fit a face.

The FullView is not just a better vision panel, it saves time and money by enabling full external inspection of a hazard area without the need to dress up in special protective clothing. This means foremen and health and safety officers can check that work is being carried out according to regulations and avoids anyone feeling that corners can be cut.

Ideal for:

- Asbestos removal
- Chemical contamination removal
- Mould, mildew and dry rot treatment
- Demolition

The FullView works on almost any area where work needs to be carried out in an enclosed space.

Specifications

The FullView is made from high transparency rigid PET making it especially strong and resistant to impact.

The FullView measures W:400mm x H:600mm. The indentation measures W:300mm x 400mm and the dome shaped indentation projects inwards by 220mm making it large enough to accommodate a head and safety helmet.

Installation

Installation is simple:

Cut a hole in the wall of the enclosed area.

If bracing is needed to support the wall above the hole, this should be installed prior to cutting the hole

Attach and seal the FullView such that it covers the hole with the indent going into the enclosed area. Use industrial duck tape or other suitable tape to do this.

Where CCTV cameras are used the FullView serves as excellent back up in the event of CCTV failure

flatView[®] vision panel

The FlatView is a flat vision panel made from high transparency rigid PET and measures: 400mm x 700mm making it large enough to tape into an airlock and still give the 300mm x 600mm viewing area, for HSE requirements.

With protective film on both sides which should be removed before use

FullView[®]

CSD Systems Limited
Pantiles Chambers • 85 High Street • Tunbridge Wells • Kent TN11 1XP • UK
T: +44 (0) 1892 614 366 F: +44 (0) 1892 535 475
www.speeddock.com info@csdsystems.co.uk